

# Datasheet

**5Wp**

## POLYCRYSTALLINE SOLAR PV MODULE



| Model Number                  | SRM-5P    |
|-------------------------------|-----------|
| Maximum Power (pmax)          | 5Wp       |
| Optimum Operating Voltage/Vmp | 18.0V     |
| Optimum Operating Current/Imp | 0.28A     |
| Open Circuit Voltage /Voc     | 21.6V     |
| Short Circuit Current /Isc    | 0.48A     |
| Module Efficiency             | 11.6%     |
| Power Tolerance (%)           | ±3        |
| Maximum Series Fuse Rating    | 15A       |
| Maximum system voltage        | 1000 V DC |

| Maximum Data                  |                    |                              |
|-------------------------------|--------------------|------------------------------|
| Operating Temperature         | -40°C~+80°C        | °C                           |
| Storage temperature           | from -40°C ~ +80°C | °C                           |
| Insulation cut voltage        | 1000               | DC                           |
| Maximum wind resistance       | 60m/s              | N/m <sup>2</sup> or max Km/h |
| Surface maximum load capacity | 200                | Kg/m <sup>2</sup>            |
| Maximum hail load capacity    | 25mm               | 80km/h                       |



### EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability



## Physical Characteristics

## I-V Curve

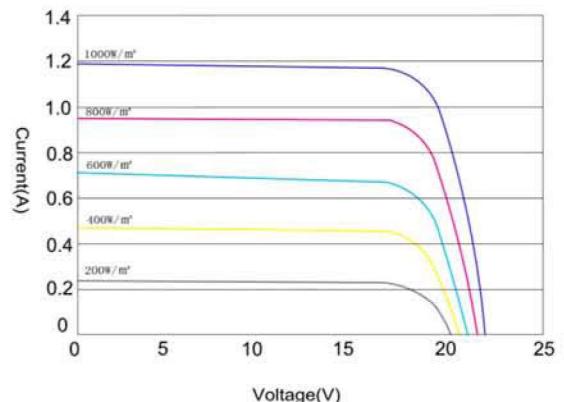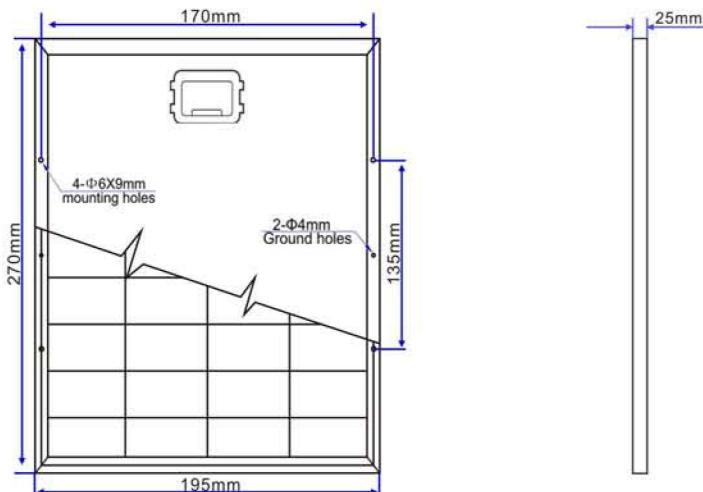

## Laminating Data

|                     |                                |
|---------------------|--------------------------------|
| Cell dimension (mm) | 52 x 31.2                      |
| Dimensions (mm)     | 195x270x25                     |
| Number of cells     | 36(4*9)                        |
| Weight              | 0.65Kg                         |
| Frame Material      | Clear anodized aluminium frame |
| Thickness of glass  | 3.2 mm tempered glass          |
| Frame               | Anodized aluminum alloy        |
| Laminating material | EVA                            |
| Backsheet material  | TPT                            |
| Junction Box        | IP65                           |


## STC

|                           |                      |
|---------------------------|----------------------|
| AM condition              | AM1.5                |
| Intensity of illumination | 1000W/m <sup>2</sup> |
| temperature               | 25°C                 |

## Temperature Characteristics

|   |           |
|---|-----------|
| Nominal Operating Cell Temperature (NOCT) | 45±2°C    |
| Temperature Coefficient of Pmax           | -0.45%/°C |
| Temperature Coefficient of Voc            | -0.34%/°C |
| Temperature Coefficient of Isc            | 0.050%/°C |

## Superior Warranty

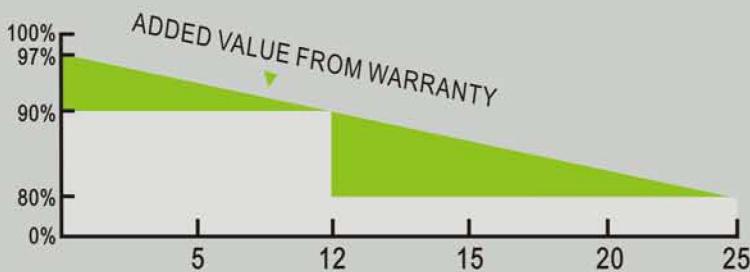

- 10 10-years Manufacturing warranty.
- 12 12-years warranty 90% power output.
- 25 25-years warranty 80% power output.