

## DTX14-BS

### Specifications


Model NO .	DTX14-BS	
Upgrade From	YTX14-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	12 Ah	
Dimensions	Length	150 mm (5.91 inches)
	Width	87 mm (3.43 inches)
	Height	146 mm (5.75 inches)
	Total Height	146 mm (5.75 inches)
Approx. Weight W/O . ACID	4.34 kg (9.57 Lbs)	
Approx. ACID Per Battery	0.73 L	
Charge Current (A)	1.2 A (14.4V constant voltage charge)	

### Characteristics

Capacity 25°C(77°F)	10hours rate (1.2 A to 10.5V)	12.0Ah
	5hours rate (2.4 A to 10.2V)	10.2Ah
	1C (12 A to 9.6V)	5.4 Ah
	3C (36 A to 9.6V)	4.3 Ah
Cold Cranking Amperes(-18°C SAE Standard)	200 A	
Cold Cranking Amperes(-18°C EN Standard)	200 A	
Internal Resistance (at 1KHz)	Approx.10m Ω	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
Charge Retention (self-discharge life) at 20°C (68°F)	1 month	85%
	3 month	80%
	6 month	75%
Warranty	1 year	
Case Material	PP	



### Dimensions

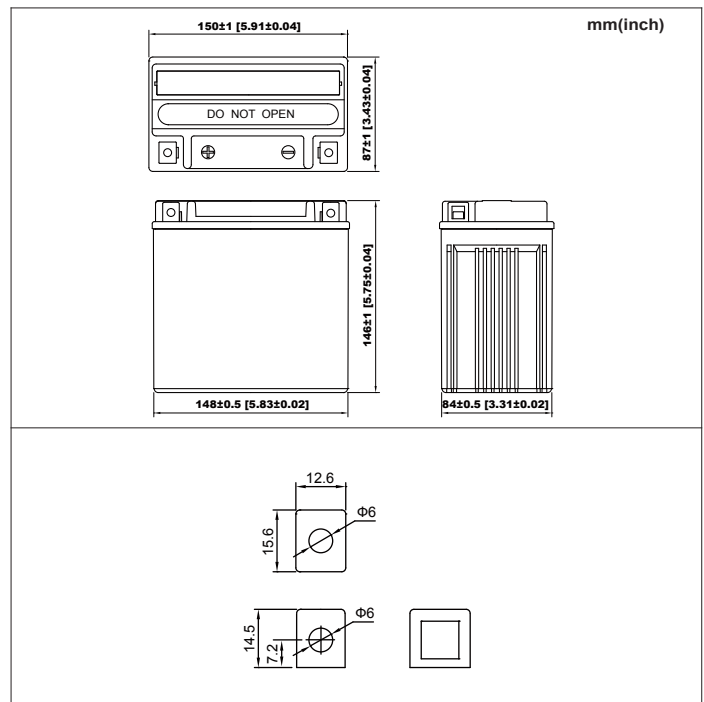

(V)  
FOR 12V  
BATTERY

### Discharge Time VS. Discharge Current(25 °C)

