


T-CHARGE 12

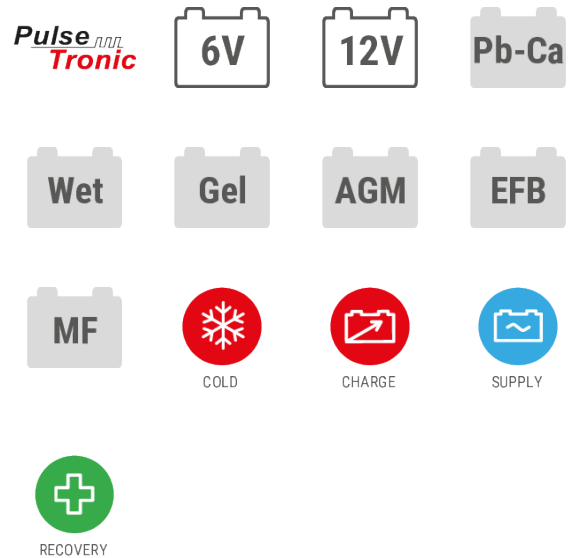

- Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries.
- Automatic charging and trickle charging in Pulse Tronic. Choice 3 charge voltages: 6V, 12V/1A (motorbike), 12V/4A (car). Charging level led display.
- Advanced functions: AGM for charging and trickle charging of AGM batteries; COLD for charging and trickle charging of batteries at low temperatures; RECOVERY to recover sulphated batteries.
- IP65 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overcharging, short circuit and pole inversion.
- Cable with clamps and cable with eyelets.

DESCRIPTION

Multifunction, battery charger and maintainer for 6/12V WET, GEL, AGM, MF, PbCa, EFB batteries.

Choice of 3 charge voltages in Pulse Tronic: 6V, 12V/1A (motos), 12V/4A (autos).

Advanced specific functions for the charge and maintenance of batteries at low temperatures and of AGM batteries.

The activation of the RECOVERY function allows for the recovery of sulphated batteries.






Features:

- Automatic charge and maintenance in Pulse Tronic;
- 3 charge voltages;
- Led visualization of the charge level;
- AGM function for the charge and maintenance of AGM batteries;
- COLD function to charge and maintain batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- Protections against overloads, shortcircuit and polarity reversal.

Equipped with cable with clamps and cable with eyelets.



TECHNICAL DATA

CODE	CODE 807567	V_{1PH}	SINGLEPHASE MAINS VOLTAGE 230 V	F	MAINS FREQUENCY 50 / 60 Hz
P	CHARGING ABSORBED POWER 55 W		CHARGING VOLTAGE 6 / 12 V	A_{EFF}	EFFECTIVE CHARGING CURRENT 1 / 4 A
A_{EN}	RATED CHAR.CUR.EN60335-2-29 1 / 4 A		MIN.RATED REFERENCE CAPAC. 2 Ah		MAX.RATED REFERENCE CAPAC. 70 Ah
IP	PROTECTION DEGREE IP65		DIMENSIONS (LxWxH) 17 x 6,5 x 3,5 cm		WEIGHT 0,6 kg

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



BROCHURE