


# T-CHARGE 12 EVO

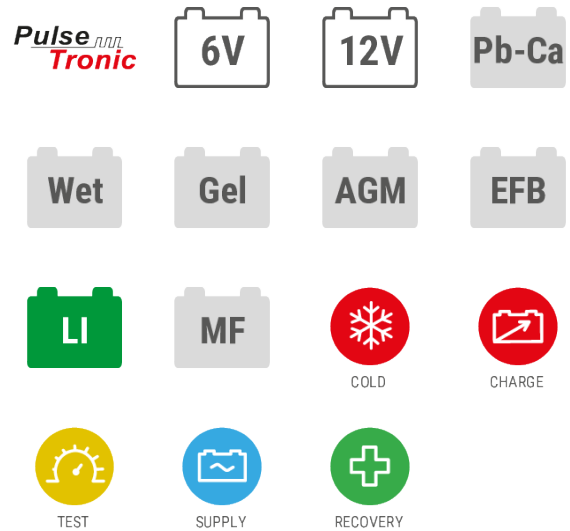

- Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries with LCD screen.
- Automatic charging and trickle charging in Pulse Tronic based on the technology of the selected battery.
- Advanced functions: COLD for charging and trickle charging of batteries at low temperatures; TEST alternator, cranking and charging status of the battery; RECOVERY to recover sulphated batteries; SUPPLY for continuous and reliable power supply during battery changes.
- IP65 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overcharging, short circuit and pole inversion.
- Cable with clamps and cable with eyelets.

## DESCRIPTION

Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries with LCD screen.

Charging and maintenance programs in Pulse Tronic dedicated to the technology of the selected battery. Advanced function for charging and maintenance of batteries at low temperatures. Activation of the RECOVERY function enables resetting of sulphated batteries. Tests the vehicle alternator and battery. Continuous and reliable power supply source during battery changes. Simplified use and immediate display of the parameters thanks to the LCD screen.






Features:

- Automatic charging and maintenance in Pulse Tronic based on the technology of the selected battery;
- COLD function for charging and maintenance of batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- TEST function for battery, start-up and alternator;
- SUPPLY function for stable power supply during battery changing;
- LCD screen;
- Protection against overloads, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.



## TECHNICAL DATA

<b>CODE</b>	CODE 807578	<b>V<sub>1PH</sub></b>	SINGLEPHASE MAINS VOLTAGE 230 V	<b>F</b>	MAINS FREQUENCY 50 / 60 Hz
<b>P</b>	CHARGING ABSORBED POWER 55 W		CHARGING VOLTAGE 6 / 12 V	<b>A<sub>EFF</sub></b>	EFFECTIVE CHARGING CURRENT 1 / 4 A
<b>A<sub>EN</sub></b>	RATED CHAR.CUR.EN60335-2-29 1 / 4 A		MIN.RATED REFERENCE CAPAC. 2 Ah		MAX.RATED REFERENCE CAPAC. 70 Ah
<b>IP</b>	PROTECTION DEGREE IP65		DIMENSIONS (LxWxH) 17 x 6,5 x 3,5 cm		WEIGHT 0,6 kg

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



BROCHURE

USEFUL LINKS



VIDEO