


T-CHARGE 26 EVO

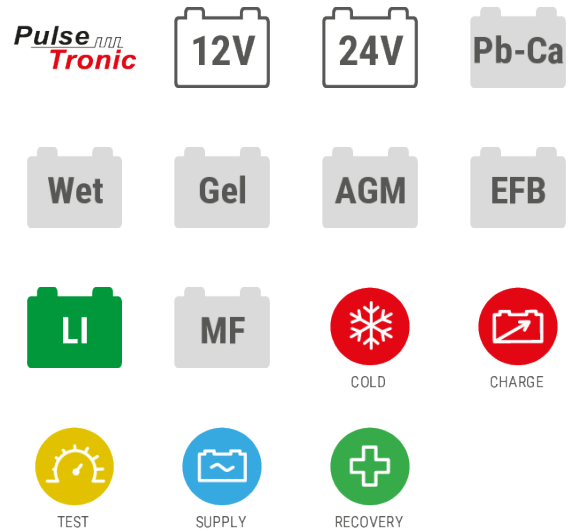

- Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 12/24V batteries with LCD screen.
- Automatic charging and trickle charging in Pulse Tronic based on the technology of the selected battery.
- Advanced functions: BOOST for rapid charging; COLD for charging and trickle charging of batteries at low temperatures; TEST alternator, cranking and charging status of the battery; RECOVERY to recover sulphated batteries; SUPPLY for continuous and reliable power supply during battery changes.
- IP44 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overcharging, short circuit and pole inversion.
- Cable with clamps and cable with eyelets.

DESCRIPTION

Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 12V/24V batteries with LCD display.

Charging and maintenance programs in Pulse Tronic dedicated to the technology of the selected battery. BOOST function for quick charge. Advanced function for charging and maintenance of batteries at low temperatures. Activation of the RECOVERY function enables resetting of sulphated batteries. Tests the vehicle alternator and battery. Continuous and reliable power supply source during battery changes. Simplified use and immediate display of the parameters thanks to the LCD display.




Features:

- Automatic charge and maintenance in Pulse Tronic based on the technology of the selected battery;
- BOOST function for quick charge of the batteries;
- COLD function to charge and maintain batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- TEST function for battery, starting and alternator;
- SUPPLY function for stable power supply during battery changing;
- LCD display;
- Protection against overcharge, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.



TECHNICAL DATA


CODE	CODE 807595	V_{1PH}	SINGLEPHASE MAINS VOLTAGE 230 V	F	MAINS FREQUENCY 50 / 60 Hz
P	CHARGING ABSORBED POWER 232 W		CHARGING VOLTAGE 12 / 24 V	A_{EFF}	EFFECTIVE CHARGING CURRENT 16 / 8 A
A_{EN}	RATED CHAR.CUR.EN60335-2-29 16 / 8 A		MIN.RATED REFERENCE CAPAC. 10 Ah		MAX.RATED REFERENCE CAPAC. 250 Ah

IP PROTECTION DEGREE
IP44

LxWxH DIMENSIONS (LxWxH)
27 x 12 x 6,7 cm

kg WEIGHT
1,6 kg


ON REQUEST ACCESSORIES



MAGNETS 2 PCS
803088

DOWNLOAD

 CATALOG IMAGE

 INSTRUCTION MANUAL

 BROCHURE