



LT - Lug Terminal

Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	4D
Cells	6		
Terminal Type	LT		
Included Hardware	M8 stainless bolts, washers & nuts		
Size & Thread	M8		

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	40 A
Maximum Charge Current	65 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	2.3 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1200
Marine Crank Amps (MCA) 32°F / 0°C	1425
Reserve Capacity (RC @ 25A)	400 Minutes
Reserve Capacity (RC @ 75A)	105 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	230 AH	2.3 A
@ 20 Hour Rate	210 AH	10.5 A
@ 10 Hour Rate	189 AH	18.9 A
@ 5 Hour Rate	172 AH	34.4 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	116	64.3	47.6	33.3	22.9	18.9


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	61.5 kg	135.5 lbs
	Length	53 cm	20.87"
	Width	20.9 cm	8.23"
	Height Inc. Term.	23.9 cm	9.41"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

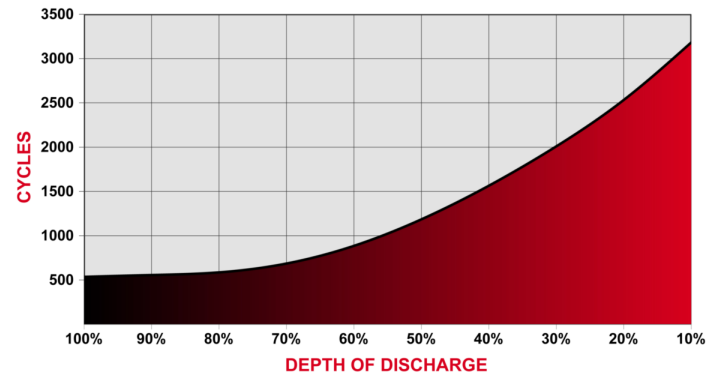

Capacity vs. Temperature

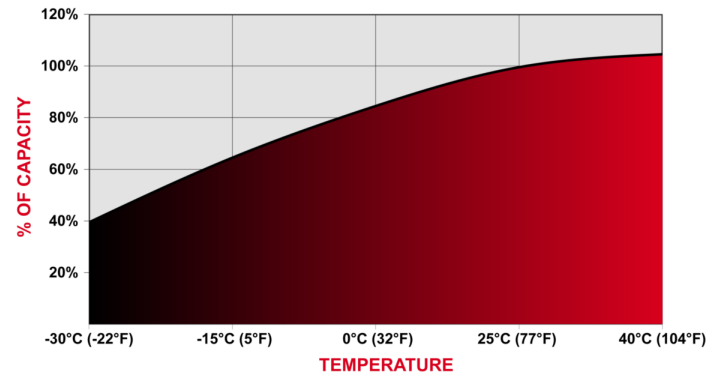

Detailed Illustration

