



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	BCI	J305
Cells	3		
Terminal Type		M8 & Auto	
Included Hardware		M8 stainless bolts & washers	
Size & Thread		M8	

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	65 A
Maximum Charge Current	100 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.6 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1300			
Marine Crank Amps (MCA) 32°F / 0°C	1560			
Reserve Capacity (RC @ 25A)	751 Minutes			
Reserve Capacity (RC @ 75A)	184 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>370 AH</b>	
@ 20 Hour Rate	<b>335 AH</b>	
@ 10 Hour Rate	<b>300 AH</b>	
@ 5 Hour Rate	<b>274 AH</b>	

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	184	102.4	75.9	54.8	36.4	30


### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	48 kg	106 lbs
	Length	29.5 cm	11.61"
	Width	17.9 cm	7.05"
	Height Inc. Term.	36.5 cm	14.37"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

### Cycle Life vs. Depth of Discharge

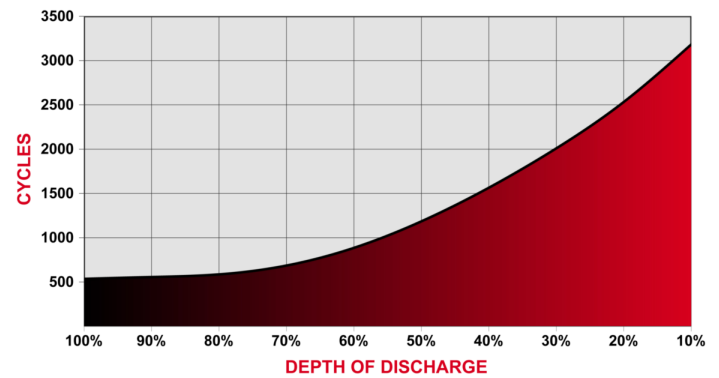

### Capacity vs. Temperature

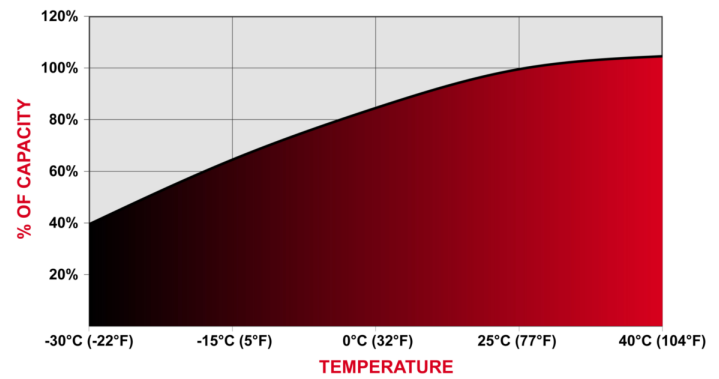

### Detailed Illustration

