



# SG 1500H

Power Lead carbon Premium Battery

**SG SERIES**  
Solar Gel Deep Cycle



\*\*\* The color and the printed specifications of the products are subject to change without prior notice.

NEWMAX Solar gel batteries are true maintenance-free sealed batteries engineered specially to satisfy the need for frequent deep cycles from PVs and renewable energy storage applications. We are confident that our technology-intensive, long-lasting, and environment friendly SG batteries will provide stability and efficiency for your everyday renewable energy needs.

**01 Longer Life 02 Maintenance Free 03 Leak Free 04 Safety**

High density, anti-corrosion lead calcium alloy is used in harmony with the GEL electrolyte to reduce the sulfation effect significantly.

NEWMAX battery has a gas recombining design that doesn't need maintenance until the end of its life.

Gel Technology is applied to prevent leakage. They won't spill even if the battery is tipped upside down.

Specially designed anti-explosion filter and safety valves prevent gas leakage when overcharged.

**General Feature**

◆ Plate	Paste type
◆ Battery type	Sealed and Maintenance free / Non-spillable construction design
◆ Case/cover mat	High-stiffness engineering PP plastic (Heat Deflection Temp. 140℃) RoHS Compliant EU Directive 2002/95/EC
◆ Safety performance	Safety valve & flame arrestor installation for explosion proof.
◆ High quality, high reliability and low self discharge rate	◆ Exceptional deep discharge recovery performance
◆ Flexibility design for multiple install positions (Position Free, GEL Technology)	
◆ Designed in accordance with and published in compliance with applicable IEC and BS EN, KS stds.	
◆ IEC 60896-21/22 Stationary lead-acid batteries – Valve regulated types	
◆ BS EN 61427 Secondary cells and batteries for photovoltaic energy systems (PVES)	
◆ KS C 8518 Stationary sealed lead-acid batteries – Valve regulated types	

**Technical Feature**



**Fahrenheit-Schutz™ Heat Protection Case**

Specially Formulated heat and flame resistant PP case material is used to effectively block ambient heat thus preventing heat related malfunctions such as thermal runaway. This proprietary high rigidity case material has heat deflection rating of 140°C.



**MaxPress™ Grid Technology**

Patent pending grid compressing technology which increase the density of the lead grain of the grids. The grain density is typically 400% greater than that of the conventional casting method. This up-to-date grid technology enables our batteries to survive even the toughest deep discharge and PSoC applications.



**ThixoPure™ GEL Technology**

Application of refined pure thixotropic colloidal silica GEL technology to battery electrolyte has greatly increased the cycle life by both preventing plate stratification and providing extra temperature protection against heat and cold. We are the first Korean company to successfully commercialize the GEL technology in the VRLA battery industry.



**FlexSealing™ Anti Explosion Filter**

Patent pending proprietary cap filtering and sealing technology. Battery cell caps are sealed simultaneously using specially designed O-ring and explosion filters to prevent leakage and gassing more effectively than ever before.





**Active Carbon™**

In every NEWMAX battery, proprietary active carbon additive is used in the active material for both positive and negative plates to enhance charge acceptance and cycle endurance. Active Carbon™ works to strengthen charge pathways to improve performance consistency and enhance performance at partial state of charge(PSoC) environment.

**Operating temperature range**

Discharge	Charge	Storage
-20℃~60℃	0℃~50℃	-20℃~60℃

Standard




M1-03


Battery model	SG 1500H (12V150AH / 20 HOUR RATE)			
Capacity (@25℃)	C <sub>20</sub> (1.80VPC)	C <sub>10</sub> (1.80VPC)	C <sub>5</sub> (1.70VPC)	C <sub>1</sub> (1.60VPC)
	150Ah	130Ah	125Ah	90Ah
Dimensions (mm/inch)	Length	Width	Height	Total Height
	524(20.63)	242(8.52)	215(8.46)	222(8.74)
Weight (kg/lbs)	43.3kg(95.46 lbs) ± 3%			
Internal resistance (mΩ)	≤3.08mΩ (25℃, 77°F), Full charged			
Max. discharge current (5sec)	1,040A	Max. discharge current(continuous)		390 A
Capacity affected by Temperature	@30℃ (86°F)	@25℃ (77°F)	@10℃ (50°F)	@-10℃ (14°F)
	105%	103%	95%	78%
Self discharge (@25℃, 77F)	After 1 month ≤2%		After 3 month ≤6%	After 6 month ≤12%
Max. short duration discharge current (0.1sec)	2,600A ± 10%			
Recommended charging (@25℃) Solar system	<b>1<sup>st</sup> Bulk step</b>	<b>2<sup>nd</sup> Absorption step</b>		<b>3<sup>rd</sup> Floating step</b>
	0.20~0.25C CC	2.40V/cell CV, (cut-off A : 0.005C)		2.28V/cell CV




## DOD % vs charging time curve (@25°C)

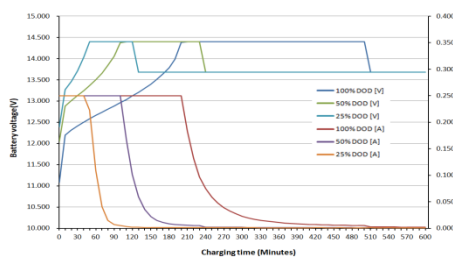


## Cycle life vs detail DOD% (@25°C)

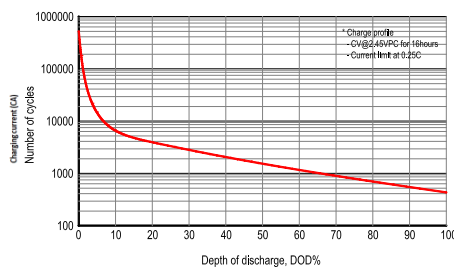

## Solar charging characteristics (@25°C)

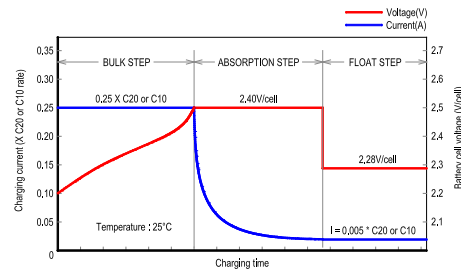


## Relationship between cycle life & temp.

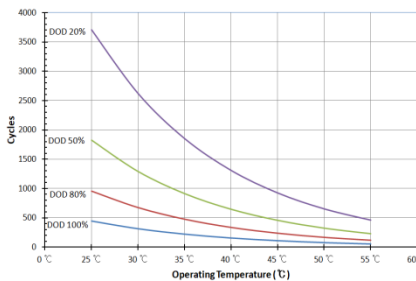


## Cycle life characteristics (@25°C)


Discharge Current : 0.17C Amphere (cut-off 1.70V/cell) Charging Current : 2.40V/cell, MAX 0.25CA  
Charging : 120% of discharge capacity (25°C)

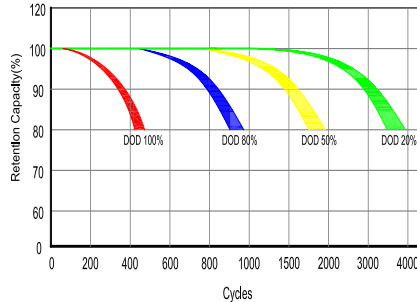


## Relationship between charging voltage & temp. (For solar system)

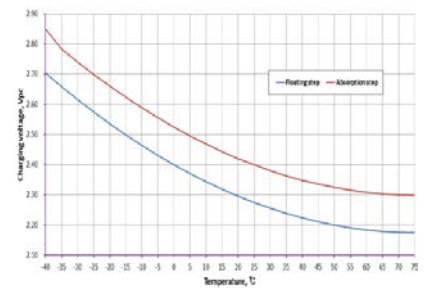


## Effect of temperature on capacity

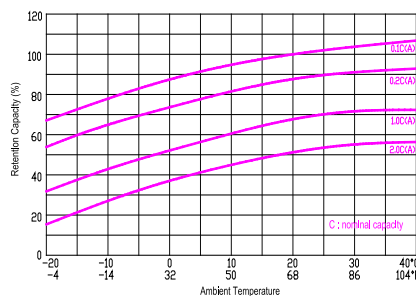

## Self discharge

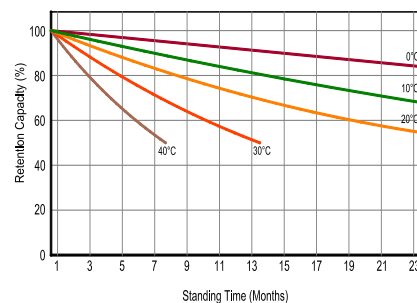

## Relationship between Floating life & temp.

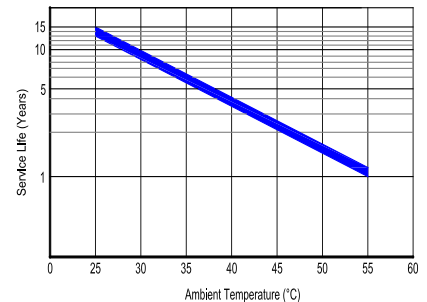

## Discharge ratings – Amperes @ 25°C

V/cell	Minutes						Hours						
	5	10	15	20	30	45	1	2	3	5	8	10	20
1.85V	250	197	163	139	125	92.6	74.1	44.2	31.5	22.7	14.6	11.9	6.89
1.80V	292	222	181	152	136	101	80.6	46.8	33.0	24.1	15.8	13.0	7.51
1.75V	331	251	202	168	147	107	83.9	48.1	33.7	24.8	16.1	13.2	7.52
1.70V	370	271	212	174	151	109	85.5	48.8	34.3	25.0	16.3	13.4	7.53
1.65V	407	283	219	179	155	111	87.1	49.3	34.9	25.3	16.6	13.5	7.56
1.60V	454	299	227	181	158	114	89.3	49.9	35.2	25.5	16.7	13.6	7.64

## Discharge ratings – Watts / Block @ 25°C

V/cell	Minutes						Hours						
	5	10	15	20	30	45	1	2	3	5	8	10	20
1.85V	2,820	2,289	1,921	1,651	1,525	1,148	929	534	380	272	177	144	83.3
1.80V	3,241	2,519	2,083	1,785	1,634	1,227	986	550	390	279	181	146	84.4
1.75V	3,608	2,756	2,255	1,900	1,708	1,267	1,015	572	401	287	184	149	84.3
1.70V	3,959	2,913	2,329	1,944	1,732	1,285	1,029	577	404	290	187	151	85.0
1.65V	4,244	3,056	2,403	1,991	1,765	1,309	1,046	583	410	293	189	154	86.0
1.60V	4,491	3,148	2,444	2,023	1,792	1,329	1,057	588	414	297	192	156	87.6